

Futuristic Car for Visually Impaired Using Robotic Vision

Ramachandran P¹ | Surya Murthi S M² | Menaga D³

^{1,2} Department of Computer Science and Engineering, KCG College of Technology, Karapakkam, Tamil Nadu, India.

³ Assistant Professor (Sr. Grade) Department of Computer Science and Engineering, KCG College of Technology, Karapakkam, Tamil Nadu, India.

To Cite this Article

Ramachandran P, Surya Murthi S M and Menaga D, "Futuristic Car for Visually Impaired Using Robotic Vision", *International Journal for Modern Trends in Science and Technology*, Vol. 05, Issue 05, May 2019, pp.-24-27.

Article Info

Received on 15-April-2019, Revised on 07-May-2019, Accepted on 13-May-2019.

ABSTRACT

This paper considers the development of a futuristic car, which would be of great help to the physically disabled people. Since these cars will rely only on what the individual is thinking they will hence not require any physical movement on the part of the second person. The car integrates signals from a variety of sensors like video, weather monitor, anti-collision etc. it also has an automatic navigation system in case of emergency. The car works on the asynchronous mechanism of machine learning. It's a great advance of technology which will make the disabled, abled. The video and thermo gram analyzer continuously monitor activities outside the car. Once the driver(disabled) nears the car. The security system of the car is activated. Images as well as thermo graphic results of the driver are previously fed into the database of the computer. If the video images match with the database entries then the security system advances to the next stage. Here the thermo graphic image verification is done with the RFID tags which is useful for the identification of the image.

Index Terms: EEG (electroencephalogram), RFID (radio frequency identification), LF-ASD (low frequency asynchronous switch design).

Copyright © 2019 International Journal for Modern Trends in Science and Technology

All rights reserved.

I. INTRODUCTION

"Robotic vision" is among the most recent advancements in automated and computerization innovation. Basically, robot vision is a modern innovation that helps a robot, typically a computerized robot, better recognize things, explore, discover protests, assess, and handle parts or bits before an application is performed.

Robots fitted with robotic vision can perform a series of different tasks:

- 1.Measuring
- 2.Reading barcodes and scanners
- 3.Engine part inspection

- 4.Packaging Inspection
- 5.Wood quality Inspection
- 6.Surface Inspection
- 7.Guidance and checking orientation of components and pieces
- 8.Inspecting for defects

II. RFID TAGS

RFID tags are a type of tracking system that uses smart barcodes in order to identify items. RFID is short for "radio frequency identification," and as such, RFID tags utilize radio frequency technology.

The tags contain electronically stored information. Passive tags collect energy from a nearby RFID reader's interrogating radio waves. Active tags have a local power source (such as a battery) and may operate hundreds of meters from the RFID reader.

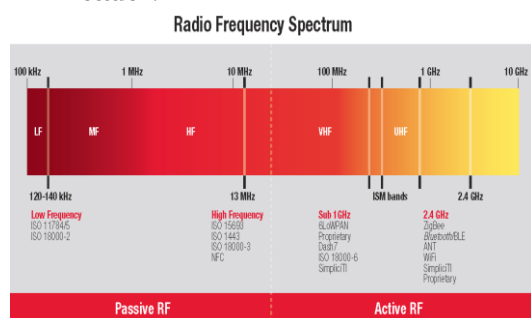


Fig1: Passive RF Vs Active RF

RFID tags come in all different sizes, shapes and materials. They vary in capabilities based on the frequency.

The biocontrol system integrates signals from various other systems and compares them with originals in the database. It comprises of the following systems:

- Brain-computer interface
- Automatic security system
- Automatic navigation system

Now let us discuss each system in detail

i. BRAIN – COMPUTER INTERFACE

Brain-computer interfaces will increase acceptance by offering customized, intelligent help and training, especially for the non-expert user. Development of such a flexible interface paradigm raises several challenges in the areas of machine perception and automatic explanation. The teams doing research in this field have developed a single-position, brain-controlled switch that responds to specific patterns detected in spatiotemporal electroencephalograms (EEG) measured from the human scalp. We refer to this initial design as the Low-Frequency Asynchronous Switch Design (LF-ASD)

The EEG is then filtered and run through a fast Fourier transform before being displayed as a three dimensional graphic. The data can then be piped into MIDI compatible music programs. Furthermore, MIDI can be adjusted to control other external processes, such as robotics. The experimental control system is configured for the particular task being used in the evaluation. Real Time Workshop generates all

the control programs from Simulink models and C/C++ using MS Visual C++ 6.0. Analysis of data is mostly done within Mat lab environment.

a) FEATURES OF EEG BAND:

- 1) Remote analysis data can be sent and analyzed in real-time over a network or modem connection.
- 2) Data can be fully exported in raw data, FFT & average formats.
- 3) Ultra low noise balanced DC coupling amplifier.
- 4) Max input 100microV p-p, minimum digital resolution is 100 microV p-p / 256 = 0.390625 micro V p-p. FFT point can select from 128
- 5) (0.9375 Hz), 256 (0.46875 Hz), 512(0.234375 Hz resolution).
- 6) Support for additional serial ports via plug-in board; allows extensive serial input & output control.
- 7) Infinite real-time data acquisition (dependent upon hard drive size).
- 8) Real-time 3-D & 2-D FFT with peak indicator, Raw Data, and Horizontal Bar displays with Quick Draw mode.
- 9) Full 24 bit color support; data can be analyzed with any standard or user.
- 10) Customized color palettes; color cycling available in 8 bit mode with Quick Drawmode.
- 11) Interactive real-time FFT filtering with Quick Draw mode. Real-time 3-D FFT (left, right, coherence and relative coherence), raw wave, sphere frequency and six brain wave switch in one OpenGL display.
- 12) Full Brainwave driven Quick Time Movie, Quick Time MIDI control; user configurable.
- 13) Full Brain wave driven sound control, support for 16 bit sound; user configurable.
- 14) Full image capture and playback control; user configurable.

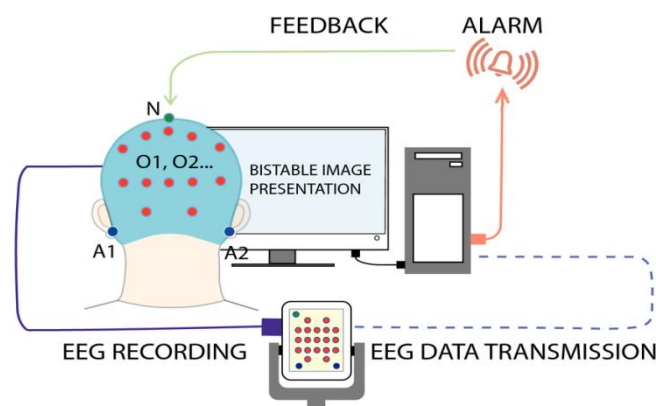


Fig. 2: EEG Transmission

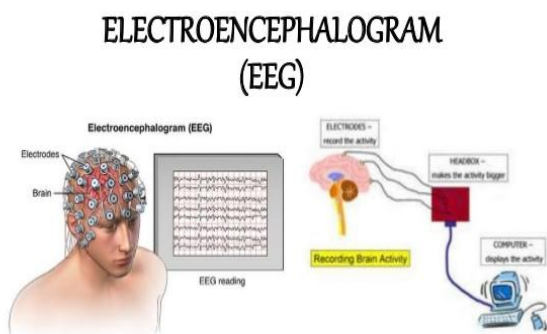


Fig. 3 EEG

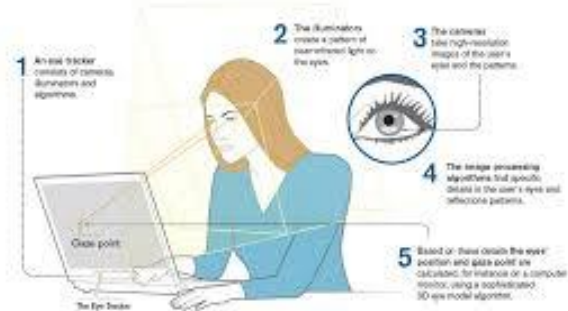


Fig.5 Eyeball Tracking

b) PERFORMANCE ANALYSIS :

1. Able-bodied subjects using imaginary movements could attain equal or better control accuracies than able-bodied subjects using real movements.
2. Subjects demonstrated activation accuracies in the range of 70-82% with false activations below 2%.
3. Accuracies using actual finger movements were observed in the range 36-83%
4. The average classification accuracy of imaginary movements was over 99%

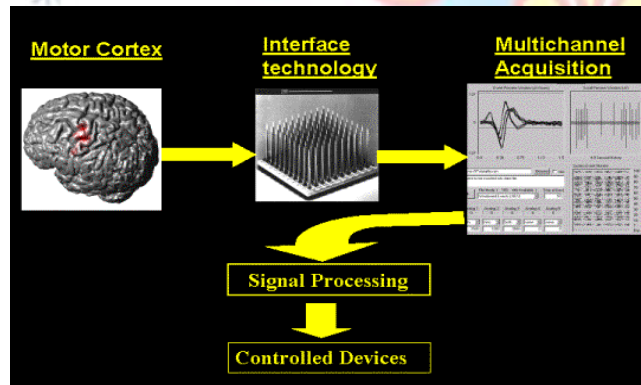


Fig.4 Brain-to- Machine Mechanism

The principle behind the whole mechanism is that the impulse of the human brain can be tracked and even decoded. The Low-Frequency Asynchronous Switch Design traces the motor neurons in the brain. When the driver attempts for a physical movement, he/she sends an impulse to the motor neuron. These motor neurons carry the signal to the physical components such as hands or legs. Hence we decode the message at the motor neuron to obtain maximum accuracy. By observing the sensory neurons we can monitor the eye movement of the driver.

As the eye moves, the cursor on the screen also moves and is also brightened when the driver concentrates on one particular point in his environment. The sensors, which are placed at the front and rear ends of the car, send a live feedback of the environment to the computer. The steering wheel is turned through a specific angle by electromechanical actuators. The angle of turn is calibrated from the distance moved by the dot on the screen.

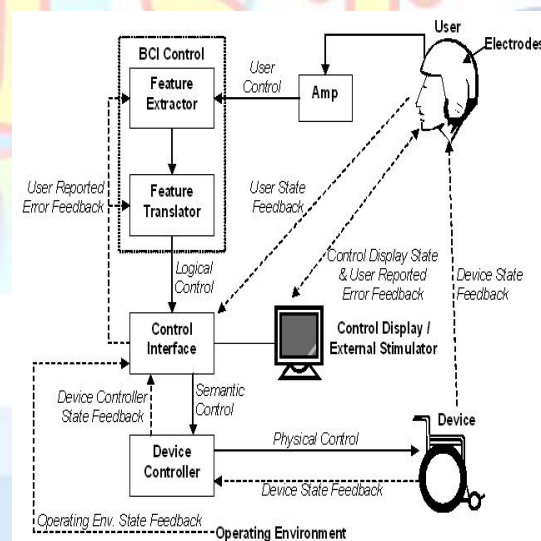


Fig.6 Electromechanical Control Unit

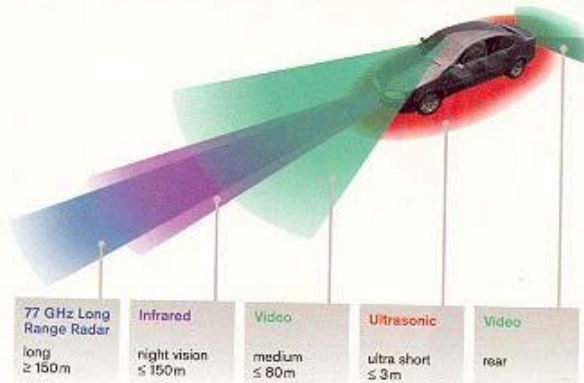


Fig.7 Sensors and Their Range

III. AUTOMATIC SECURITY SYSTEM

The EEG of the driver is monitored continually. When it drops less than 4 Hz then the driver is in an unstable state. A message is given to the driver for confirmation to continue the drive. A confirmed reply activates the program automatic drive. The computer prompts the driver for the destination before the drive.

IV. AUTOMATIC NAVIGATION SYSTEM

As the computer is based on artificial intelligence it automatically monitors every route the car travels and stores it in its map database for future use. The map database is analyzed and the shortest route to the destination is chosen. With traffic monitoring system provided by xm satellite radio the computer drives the car0 automatically. Video and anti-collision sensors mainly assist this drive by providing continuous live feed of the environment up to 180 m, which is sufficient for the purpose.

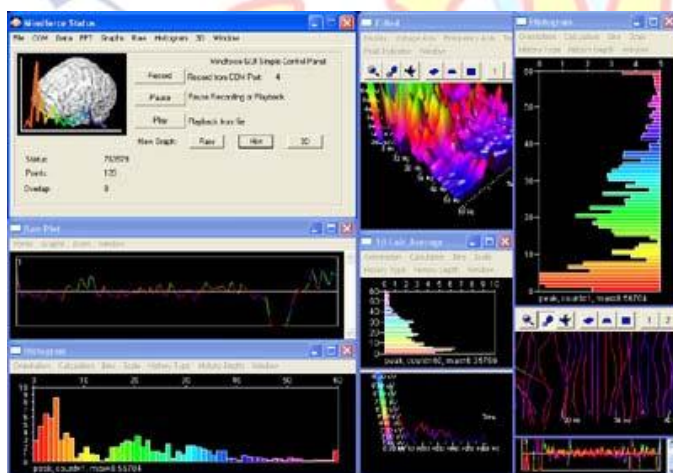


Fig.8 EEG Analysis Window

V. CONCLUSION

When the above requirements are satisfied and if this car becomes cost effective then we shall witness a revolutionary change in the society where the demarcation between the abler and the disabled vanishes. Thus the integration of bioelectronics with automotive systems is essential to develop robotic vision.

REFERENCES

- [1] Off-line Classification of EEG from the "New York Brain- Computer Interface (BCI)" Flotzinger, D., Kalcher, J., Wolpaw, J.R., McFarland, J.J., and Pfurtscheller, G., Report #378, IIG-Report

Series, IIG:Institutes for Information Processing, Graz University of Technology, Austria 1993.

- [2] "Man-Machine Communications through Brain-Wave Processing" Keirn, Z.A. and Aunon, J.I., IEEE Engineering in Medicine and Biology Magazine, March 1990.
- [3] Automotive engineering, SAE, June 2005
- [4] Automotive mechanics, Crouse, tenth edition, 1993
- [5] "The brain response interface: communication through visually-induced electrical brain responses" Sutter, E.E., Journal of Microcomputer Applications, 1992, 15:31-45.